

## Custom Extruders

Rotuba is a privately owned company incorporated in 1945, with headquarters and manufacturing located in Linden NJ. We also have representation in Asia and Europe with warehousing facilities in Asia.



Rotuba is an industry leader in custom extrusions for the Lighting and the Point of Purchase display industries.

Our on site facilities and expertise include; in house tool and die machine shop and fully integrated Autocad system.


Our aim is to work with our customers as collaborative partners to provide end to end solutions.

## Contact Us


**Rotuba Extruders Inc.**  
1401 Park Avenue South  
Linden NJ 07036  
Tel (908) 486-1000  
Fax (908) 486-0874  
Patrick McEvoy x 245  
pmcevoy@rotuba.com  
www.rotuba.com

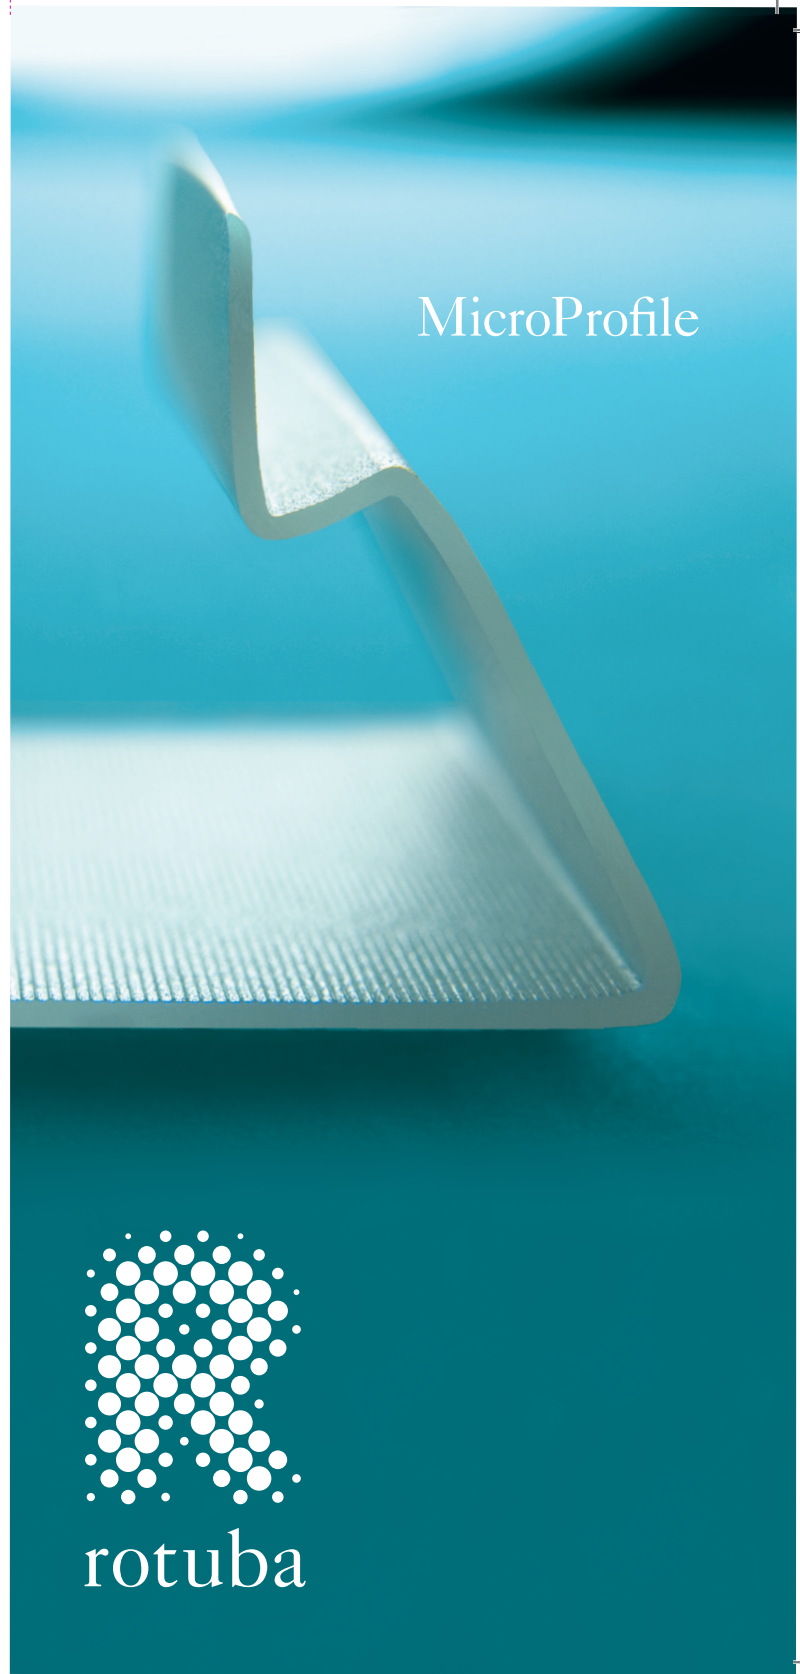

rotuba

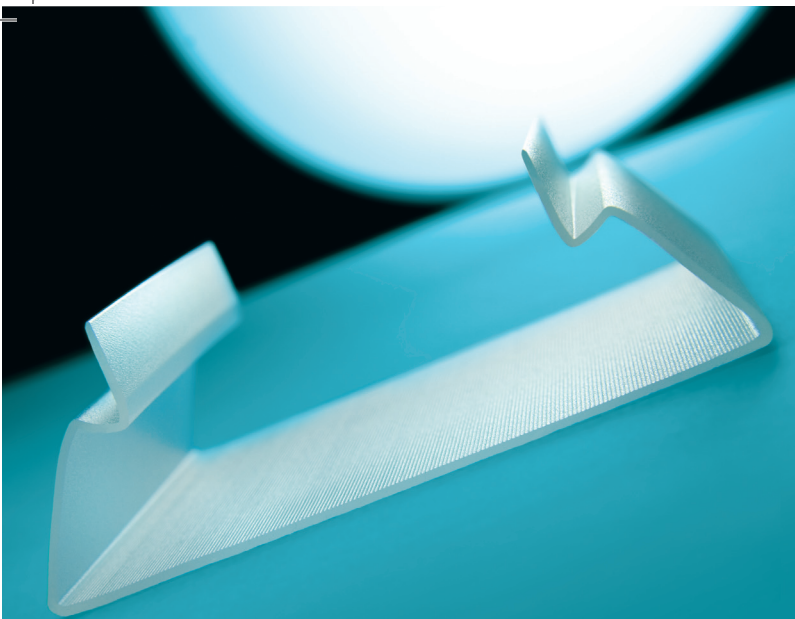

Superior look  
and performance

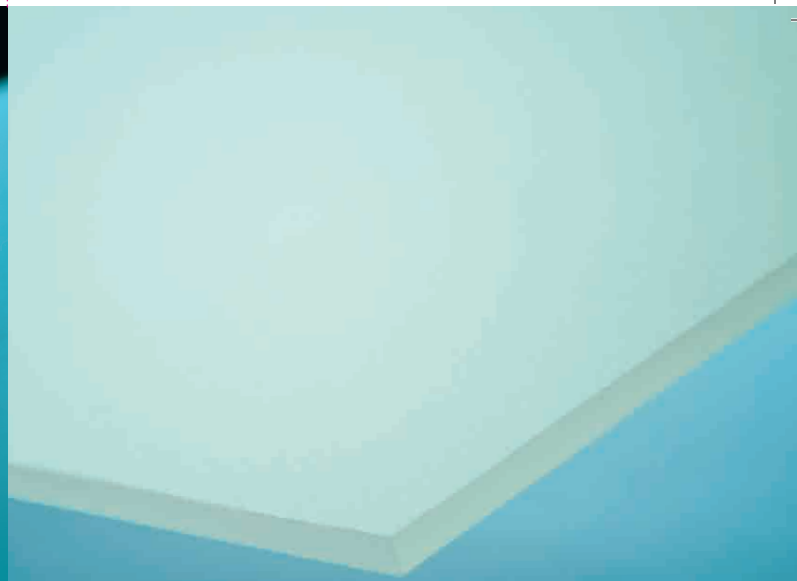

Enhanced high  
angle brightness

### MicroProfile by ROTUBA

The MicroProfile from Rotuba offers a superior look and performance in profile applications. The MicroProfile from Rotuba offers enhanced high angle brightness while offering superior bulb obscurity through the use of specially designed mini-prisms.

- Enhances bulb obscurity
- Offering high angle brightness
- Eliminates the need for overlays
- Perfect for direct/indirect applications
- Made of Clear Acrylic or any version of Impact Modified Acrylic, Frosted Impact Acrylic; custom formulated to user requirements.
- Up to 85%-90% light transmission (lens only)
- Profile applications from 1" to 20" wide
- 0.060" – 0.125" standard thicknesses

### Frosted Impact Sheet by ROTUBA

Frosted Impact Sheet from Rotuba offers a more refined look for bulb obscurity while enhancing light transmission quality as compared to traditionally embossed aterns.

- Made of Frosted Impact Acrylic; custom formulated to user requirements.
- Enhances bulb obscurity
- Eliminates the need for overlays
- Up to 90% light transmission depending on formulation and thickness (lens only)
- Sheet from 10.5" to 50" wide in lengths up to 102"
- 0.040", 0.060", 0.070", 0.095", 0.110", 0.125", 0.140", 0.156", 0.187" standard thicknesses